



AXR.UC.1

Refrigerated Undercounter - 1 Door

Product Information:


- Adjustable digital temperature control (from -2°C - 8°C)
- Fan assisted cooling
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R600a Hydrocarbon refrigerant
- Two adjustable shelves and base shelf included
- Reversible doors - lockable
- CFC free polyurethane insulation
- Supplied on adjustable feet
- 600mm depth to suit compact applications

Designed and Engineered in Australia to meet Australian Standards
24 Months on-site parts and labour warranty



Specifications

Model	AXR.UC.1
W x D x H (mm)	595 x 600 x 840
Weight	44kg
Packed Dimensions (mm)	630 x 640 x 1055
Packed Weight	53kg
Net Capacity	77 Litres
Operation	-2°C - 8°C
Refrigerant	R600a
Climate Class	4
Max Ambient	32°C
Power	230VAC / 50Hz / 0.32kW 10A plug & lead

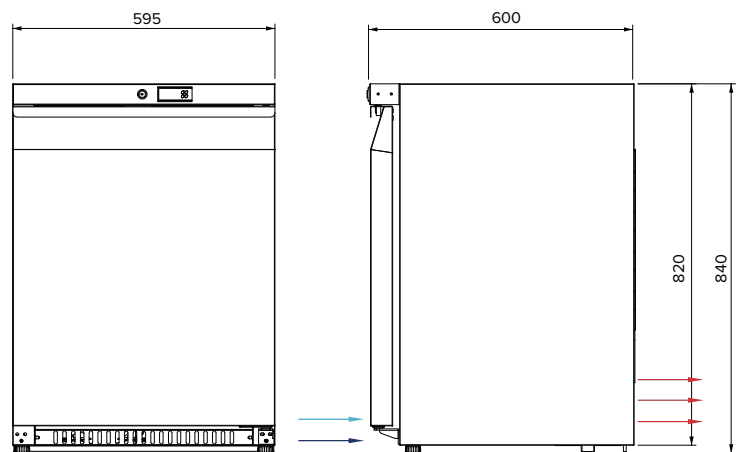

FRONT VIEW

SIDE VIEW

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 19/09/2022 - 03

www.stoddart.com.au

www.stoddart.co.nz

