



AXR.UCGN.2

Refrigerated Undercounter 2 Door - 1/1GN

Product Information:

- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C - 6°C)
- Fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Stainless Steel worktop as standard
- 1/1GN shelf configuration with adjustable runners
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Self-closing, lockable doors
- Supplied on standard and lockable castors for a 840mm finish height. Optional spacer to increase to 900mm working height
- 3 and 4 door models also available, with glass or solid doors




Designed and Engineered in Australia to meet Australian Standards
24 Months on-site parts and labour warranty

Optional Accessories:

- Height increase channel spacer pair (AXR.UCGN.CH) (2 required)
- 1/1GN shelf with runners (AXR.UCGN.SHELFKIT)

Specifications

| | |
|-------------------------------|---|
| Model | AXR.UCGN.2 |
| W x D x H (mm) | 1360 x 700 x 840 |
| Weight | 102kg |
| Packed Dimensions (mm) | 1390 x 730 x 880 |
| Packed Weight | 121kg |
| Net Capacity | 184 Litres |
| Operation | 0°C - 6°C |
| Refrigerant | R290 |
| Climate Class | 4 |
| Max Ambient | 40°C |
| Power | 230VAC / 50Hz / 0.33kW 10A plug & lead |

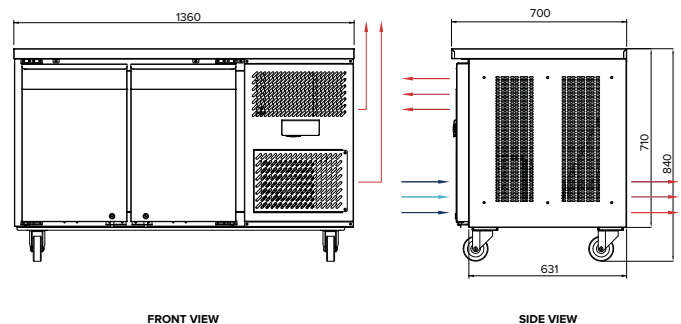

Due to continuous product research and development,
the information contained herein is subject to change without notice.

Revision: A - 19/09/2022 - 03

www.stoddart.com.au
www.stoddart.co.nz

