



Refrigerated Undercounter 3 Door - 1/1GN

Product Information:

- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C 6°C)
- Fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- · Efficient LED lighting for increased product visibility
- · Stainless Steel worktop as standard
- 1/1GN shelf configuration with adjustable runners
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- · Self-closing, lockable doors
- Supplied on standard and lockable castors for a 840mm finish height. Optional spacer to increase to 900mm working height
- 2 and 4 door models also available, with glass or solid doors



Designed and Engineered in Australia to meet Australian Standards 24 Months on-site parts and labour warranty

Optional Accessories:

- Height increase channel spacer pair (AXR.UCGN.CH) (2 required)
- 1/1GN shelf with runners (AXR.UCGN.SHELFKIT)

Specifications

 Model
 AXR.UCGN.3

 W x D x H (mm)
 1795 x 700 x 840

Weight 122kg

Packed Dimensions (mm) 1825 x 730 x 880

 Packed Weight
 146kg

 Net Capacity
 276 Litres

 Operation
 0°C - 6°C


 Refrigerant
 R290

 Climate Class
 4

 Max Ambient
 40°C

Power 230VAC / 50Hz / 0.33kW

10A plug & lead

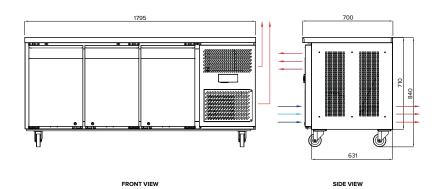

Due to continuous product research and development, the information contained herein is subject to change without notice.



www.stoddart.com.au www.stoddart.co.nz

