

ecomax plus

by **HOBART**

GLASSWASHER G415



kwik
HOSPITALITY EQUIPMENT

Units 9 & 10
124-130 Auburn Street
Wollongong

02 4226 9779
info@kwikhe.com.au

kwikhe.com.au



made in germany

ECOMAX PLUS G415 GLASSWASHER

ecomax plus
by **HOBART**

The compact glasswasher for hotels, bars and restaurants, that are washing more than a hundred glasses a day.

Glasswasher ecomax plus G415

Cycle times*	60/90/180sec.
Capacity per hour*	up to 60 racks (900 glasses)
Wash/rinse temperature	60°
Tank capacity	8 l
Fresh water consumption/rack	2.0 l
Wash pump	0.6 kW
Heating booster/tank	0.8 kW
Total loading	2.8 kW 15A
Rated voltage	240 / 50 / 1 - 15A
Width/Depth/Height	460/590/700mm
Loading height	315 mm
Rack size	396mmx396mm / 431mmx355mm


*hot water connection *
Machine supplied with 150mm adjustable legs
Line pressure required: 0.8 to 6 bar

kwik
HOSPITALITY EQUIPMENT

Units 9 & 10
124-130 Auburn Street
Wollongong

02 4226 9779
info@kwikhe.com.au

kwikhe.com.au

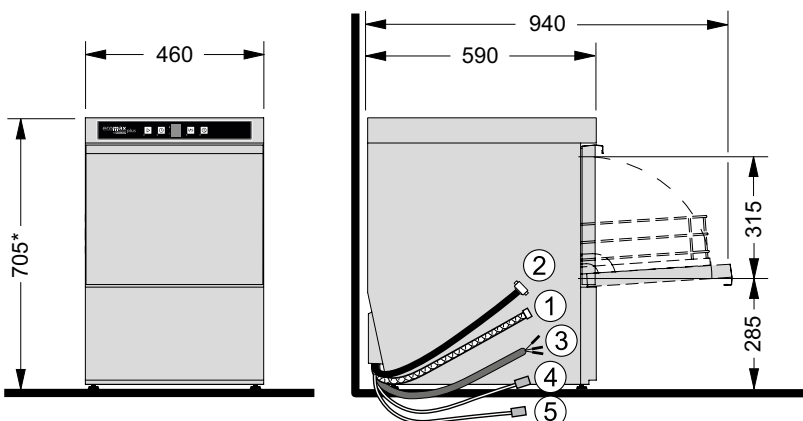

* + 40 mm adjustable feet

PRODUCT ADVANTAGES

- Electronic control with digital temperature indication
- Flat surface of control panel
- 3 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Indented nozzles prevent blocking
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Stainless steel rinse arm and housing
- Removal of rinse arms without any tools
- Easy access to all parts
- Deep-drawn wash tank
- Double-walled housing and heat insulated front door
- Tank strainer, coarse filter and pump suction casing
- Door damping control
- Loading height above average: 315 mm, for easy loading of extra high glasses
- Fully equipped with detergent and rinse aid dispenser, rinse pressure pump and drain pump

plus

STANDARD EQUIPMENT

- Watermark Approved
- Universal flat rack 371450-83
- Glass rack with 4 sloped rows 371450-84
- Rinse aid & detergent dispensers
- Electric cable, flexible water supply hose and drain hose
- Rear panelling

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
Reverse Osmosis unit (RO-S)	Independent gravity waste to tundish
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener)- 6 bar
Max. supply water temperature	60°C 35°C with RO
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

A registered trademark of HOBART GmbH · Member of the ITW Food Equipment Group Europe

HOBART | 1/2 Picken St, Silverwater NSW 2128 | Phone: 1800 462 278 | sales@hobartfood.com.au | www.hobartfood.com.au