

ecomaxTM
by **HOBART**

**HOOD-TYPE
DISHWASHER
H604**



kwik
HOSPITALITY EQUIPMENT

Units 9 & 10
124-130 Auburn Street
Wollongong

02 4226 9779
info@kwikhe.com.au

kwikhe.com.au



made in germany

ECOMAX H604 HOOD-TYPE DISHWASHER



The dishwasher for ergonomic and efficient work processes in the kitchen. Combined with tables, it is a powerful partner for the catering and hotel sector.

Hood-type Dishwasher ecomax H604

Cycle times*	75/150/180 sec
Capacity per hour*	up to 48 racks
Wash/rinse temperature	approx 60° C / approx 82°C
Tank capacity	21 l
Fresh water consumption/rack	2.3 l
Wash pump	0.4 kW
Heating booster/tank	2.6 kW
Total loading	3.2 kw
Rated voltage	240V/50hz/1
Width/Depth/Height	635/742/1480 (1960 open) mm
Loading height	440 mm
Rack size	500 x 500 mm

hot water connection

PRODUCT ADVANTAGES

- The 4-sided closed hood keeps energy and humidity in the system and saves up to 3 kW energy
- Electronic control with digital temperature indication and 3 programmes for easy operation
- Deep-drawn wash tank for easy cleaning
- Stainless steel rinse arm and housing
- Rotating wash and rinse arms for an even water distribution
- Intended nozzles prevent blocking
- Incl. connection cable, supply and drain hose for immediate operation
- Thermostop function for guaranteed temperatures
- Self-cleaning programme for hygienic cleanliness also in the machine
- Removal of rinse arms without any tools
- Easy access to all parts
- Automatic first fill
- Loading of extra high trays and pots: 440 mm loading height
- Temperature indication on the front panel
- Door safety lock

STANDARD EQUIPMENT

- Watermark Approved
- Plate rack P-18-12
- Cutlery basket CB1
- Rinse aid & detergent dispensers
- Heater with thermostat control
- Electric cable, flexible water supply hose and drain hose




Units 9 & 10
124-130 Auburn Street
Wollongong

02 4226 9779
info@kwikhe.com.au

kwikhe.com.au



Connection to cold water or reduced voltage can extend the heating time and the program runtime. We recommend an external water softener for feed water hardness above 3°dH

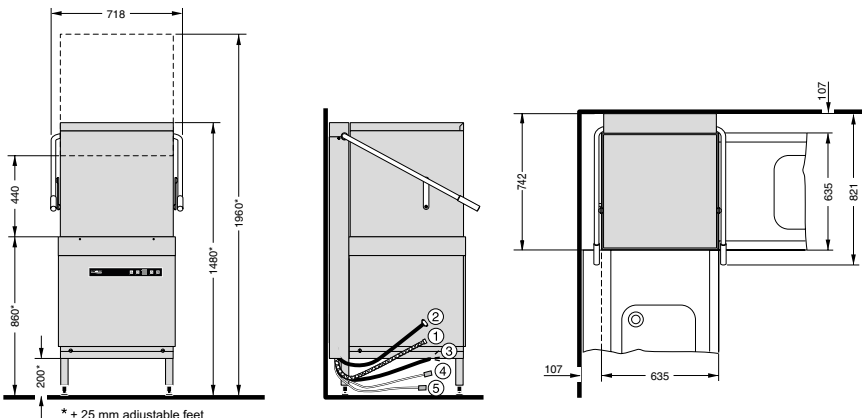

CONNECTIONS

① Drain hose	2,000 mm ID 20 / OD 25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	2.0 - 6 bar (200 to 600kPa)
Max. supply water temperature	60 °C
③ Power cord	2,500 mm
Supply hose for	
④ Detergent	2,000 mm
⑤ Rinse aid	2,000 mm