

ecomax plus

by **HOBART**

kwik
HOSPITALITY EQUIPMENT

Units 9 & 10
124-130 Auburn Street
Wollongong

02 4226 9779
info@kwikhe.com.au

kwikhe.com.au

f @

DISHWASHER F515



made in germany

ECOMAX PLUS F515 DISHWASHER

ecomax plus
by **HOBART**

Due to the high wash power, the double-walled housing and the robust filter systems, it is the quiet and resource-saving solution for your busy workday life.

Dishwasher ecomax plus F515

Cycle times*	60/120/180 sec.
Capacity per hour*	up to 60 racks
Wash/rinse temperature	approx 60° C / approx 82°C
Tank capacity	10.6 l
Fresh water consumption/rack	2.3 l
Wash pump	0.6 kW
Heating booster/tank	2.1 kW
Total loading	2.9 kW 15A
Rated voltage	240/50/1
Width/Depth/Height	600/600/825 mm
Loading height	425 mm
Rack size	500 x 500 mm

*hot water connection


PRODUCT ADVANTAGES

- Electronic control with digital temperature indication
- Flat surface of control panel
- 3 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Indented nozzles prevent blocking
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Stainless steel rinse arm and housing
- Removal of rinse arms without any tools
- Easy access to all parts
- Deep-drawn wash tank
- Double-walled housing and heat insulated front door
- Tank strainer, coarse filter and pump suction casing
- Door damping control
- Loading height above average: 425 mm, for easy loading of large plates
- Fully equipped with detergent and rinse aid dispenser, rinse pressure pump and drain pump

plus

STANDARD EQUIPMENT

- Watermark Approved
- Plate rack P-18-12
- Universal flat rack B-00-07
- Plastic cutlery rack with 4 boxes 01-246175-1
- Rinse aid & detergent dispensers
- Electric cable, flexible water supply hose and drain hose
- Rear panelling

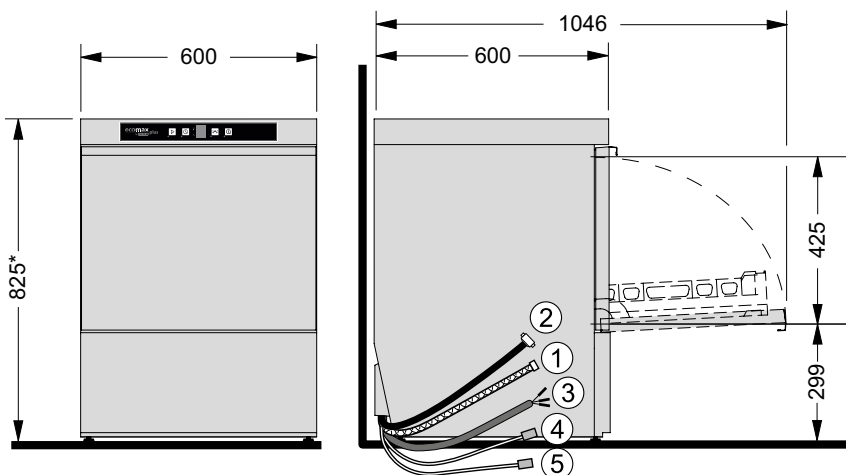

* + 40 mm adjustable feet

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
RO-IV / RO-S	Independent gravity waste to tundish
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener)-6 bar
Max. supply water temperature	60°C 35°C with RO
Required flow rate	5 l/min
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

A registered trademark of HOBART GmbH · Member of the ITW Food Equipment Group Europe

HOBART | 1/2 Picken St, Silverwater NSW 2128 | Phone: 1800 462 278 | sales@hobartfood.com.au | www.hobartfood.com.au