



Utensil Washer ecomax 702

Cycle times*	120/360 sec
Capacity per hour*	up to 30 cycles
Wash/rinse temperature	60 - 65°C / min 82°C
Tank capacity	80 l
Fresh water consumption/cycle	4.5 l
Wash pump	2.9 kw
Heating booster/tank	9 kw / 3.3 kw
Total loading	12 kw
Rated voltage	400V/50Hz/3/N
Width/Depth/Height	780/945/1765 mm
Loading height	630 mm
Rack size	600 x 760 mm


FEATURES

- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Deep-drawn wash tank bottom, no hygiene problems with corners and edges
- Thermostop-function for guaranteed rinse temperatures
- Removal of wash and rinse arms without any tools
- Easy access to all parts
- Flat surface of control panel
- Loading of high trays and pots: up to 630 mm loading height
- 150 mm floor clearance
- Electronic control
- Made completely out of stainless steel
- Tank covered with strainer made of stainless steel
- Back flow prevention & Watermark Approved

STANDARD EQUIPMENT

- Stainless steel base rack, 8 tray support insert & universal 500x500mm rack - B-00-07
- Fully equipped with detergent & rinse aid dispenser, rinse pressure pump and drain pump
- Electric plug & lead, water supply hose & drain hose

*hot water connection

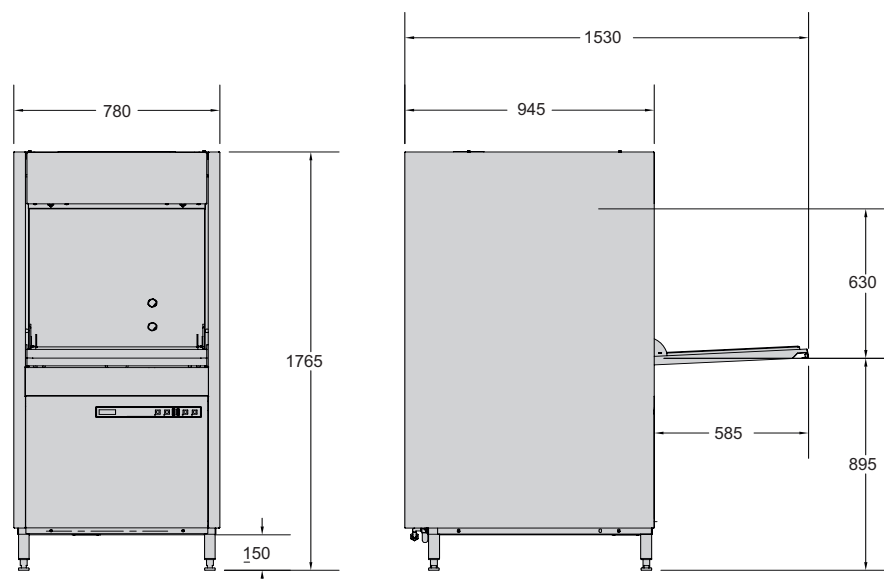

Connection to cold water or reduced voltage can extend the heating time and the program runtime. For machine protection the water hardness should not exceed 3°dH, if higher we recommend using a water softener or an external water treatment system.