


700 SERIES S/S WORKBENCH



- Fridge -2 to 8°C
- Freezer -18 to -22°C
- Solid Door fridge Ambient 43°C
- Glass Door fridge Ambient 35°C
- Solid Door freezer Ambient 38°C
- Fan-forced evaporator cooling
- Auto defrost
- Self evaporating drainage
- Insulation is CFC & HCFC free
- Heated door frame on freezers
- Internal corners constructed for easy cleaning
- 100mm wall clearance required for ventilation
- Glass door fridges come with internal LED lights
- Castors
- Optional splash back





TL900TN



TL1200TN / TL1200BT

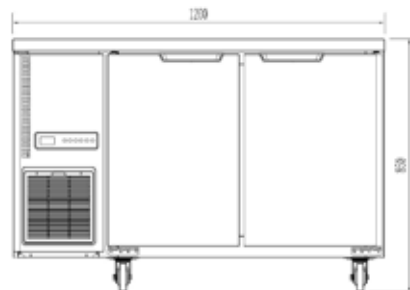

TL1500TN / TL1500BT

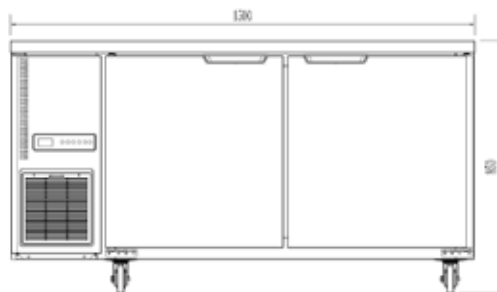

Code	Litre	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range	Ambient/ RH%	Voltage	Power (W/A)
S/S single door fridge							
TL900TN	166	900x700x850	83	-2 to +8	43/40	240	170/10
S/S double door fridge							
TL1200TN	212	1200x700x850	70	-2 to +8	43/40	240	219/10
TL1500TN	315	1500x700x850	106	-2 to +8	43/40	240	235/10
S/S large triple door fridge							
TL1800TN-3D	417	1800x700x850	113	-2 to +8	43/40	240	250/10


Allow 100mm clearance for installation, all vents must be left clear. Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ




TL1800TN / TL1800BT




TL1200TNG

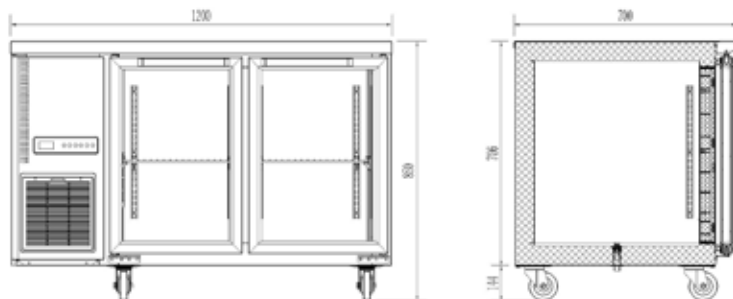

TL1500TNG

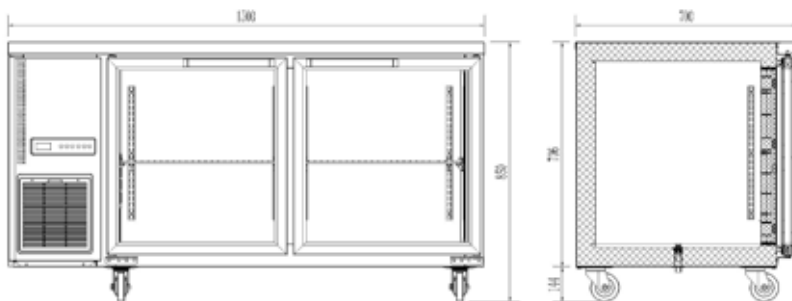

TL1800TNG

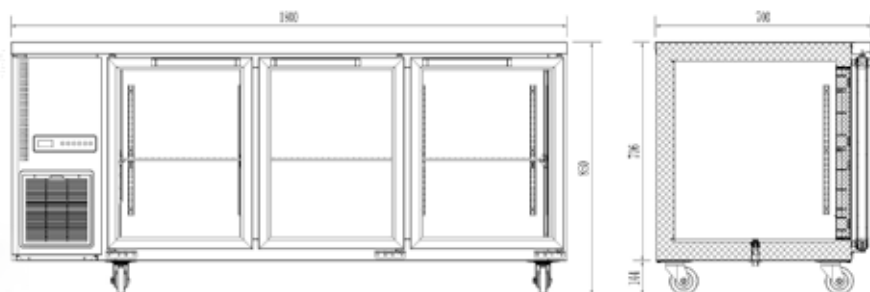

Code	Litre	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range	Ambient/ RH%	Voltage	Power (W/A)
S/S double glass door fridge							
TL1200TNG	212	1200x700x850	130	-2 to +8	35/60	240	240/10
TL1500TNG	315	1500x700x850	145	-2 to +8	35/60	240	280/10
S/S large Triple glass door fridge							
TL1800TNG-3D	417	1800x700x850	160	-2 to +8	35/60	240	320/10
S/S double solid door freezer							
TL1200BT	156	1200x700x850	130	-18 to -22	38/50	240	520/10
TL1500BT	259	1500x700x850	145	-18 to -22	38/50	240	530/10
S/S large triple solid door freezer							
TL1800BT-3D	361	1800x700x850	160	-18 to -22	38/50	240	568/10

Allow 100mm clearance for installation, all vents must be left clear.

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ